

## NEOPAN 100 ACROS

### 1. FEATURES AND USES

NEOPAN 100 ACROS is a medium-speed, ultrahigh-image-quality black-and-white negative film that boasts the world's highest standard in grain quality among ISO-100 films, rich gradation and outstanding sharpness. These features make it an excellent choice for a wide range of photographic applications, including portraits, landscape, architectural subjects, product photography, photomicrography and duplication work.

- **World's Highest Standard in Grain Quality**

Through the incorporation of Fujifilm's new proprietary "Super Fine- $\Sigma$  Grain Technology", this film delivers the world's highest standard in grain quality among ISO-100 black-and-white films. Its fine grain, along with its superb grain alignment and rich gradation, makes possible smoother and sharper textural depiction, even in big enlargements.

- **Excellent Processing Characteristics**

By incorporating the newly developed "P.I.D.C. (Precision Iodine Distribution Control) Technology", NEOPAN 100 ACROS provides stable processing results not only during manual processing with all kinds of developers and fixers, but in every type of automatic processor as well.

- **Improved Reciprocity Characteristics**

This film exhibits extremely minimal reduction in sensitivity even in extended, low-light exposures, thus producing excellent results in astronomical photography and night scenes, as well as architecture and other subjects requiring long exposures.

### 2. FILM SIZES, BASE MATERIAL AND THICKNESS

<b>135</b>	24- and 36-exp.	Cellulose Triacetate	0.122 mm thickness
<b>35 mm</b>	30.5 m (100 ft), darkroom loading type		
<b>120</b>	12-exp. (6×6 cm)		0.104 mm thickness

### 3. SPEED

**ISO 100/21°**

### 4. COLOR SENSITIVITY

**Orthopanchromatic**

### 5. EXPOSURE GUIDE

Use an exposure meter for exposure determination. If a meter is not available, refer to the following table.

Light Conditions	Seashore or Snow Scenes under Bright Sun	Bright Sunlight	Hazy Sunlight	Cloudy Bright	Cloudy Day or Open Shade
<b>Lens Aperture</b>	f/16	f/11	f/8	f/8	f/5.6
<b>Shutter Speed (sec.)</b>	1/250		1/125		

- **Reciprocity Characteristics**

No exposure compensation is required for exposures at shutter speeds of less than 120 seconds. However, for exposures of 120 seconds or longer, provide the compensation indicated below.

<b>Exposure Time (sec.)</b>	120 – 1000
<b>Exposure Corrections*</b>	+1/2

\* A "+" followed by a number indicates the required increase in lens opening.

- The use of an exposure meter is recommended, especially for indoor photography due to the wide variation in brightness levels that may be encountered. Use of a tripod or other means of stabilizing the camera is recommended for exposures at shutter speeds of less than 1/100 second.

**Flash Exposure**

• **Shutter Speed**

When electronic flash exposures are to be made, the shutter speed for cameras with a focal-plane shutter should be set in accordance with the camera instructions. In the case of lens-shutter cameras (such as compact cameras, certain medium-format cameras and studio cameras), the shutter speed can be varied.

• **Lens Aperture**

The following formula can be used to obtain satisfactory lens opening.

$$\text{Aperture (f-number)} = \frac{\text{Electronic Flash Guide Number (at ISO 100)}}{\text{Electronic Flash-to-Subject Distance (meters or feet)}}$$

When an automatic electronic flash unit is employed, set the film speed at ISO 100. Since the amount of light reflected onto subjects from surrounding surfaces will differ with the conditions, refer to the flash unit instructions.

**Filter Recommendations**

When a filter is to be used, multiply the normal exposure by a proper filter factor using the table below as a guide.

Filter	Fuji Filter	SC-39 (UV)	SC-48 (yellow)	SC-56 (orange)	SC-60 (red)
	Wratten Filter	No.1A	No.8	No.21	No.25
Filter Factor	Daylight	1.0	2.0	4.0	8.0
	Tungsten	1.0	1.5	3.0	6.0

**6. SAFELIGHT**

Handle the film in total darkness. If a safelight must be used, a Fuji Safelight Filter SLG-4\* (dark green) with a 20 watt bulb may be used at a distance not less than 1 meter (3.3 ft.). In such cases, use the safelight for as short a period as possible and only towards the end of the development period.

**7. PROCESSING**

**(1) Development**

To prevent the appearance of development marks and assure uniform finish, agitate the developer continuously for the first minute and for five seconds every minute thereafter.

• **Development Conditions (Small Tank Development)**

The following table shows development times and temperatures for each developer.

Unit: minutes

Developer	Temp. EI	18°C	20°C	22°C	24°C	26°C
		(64°F)	(68°F)	(72°F)	(75°F)	(79°F)
Microfine	100	12 1/2	10	8 1/2	7	5 3/4
Microfine (1:1)	100	—	15	12 1/2	10	8 1/4
Fujidol E	100	11	9	7 1/4	6	4 3/4
	200	—	17	14	11	8 3/4
Fujidol E (1:1)	100	15	12 1/2	10 1/2	8 3/4	7 1/4
Super Fujidol-L	100	7 1/4	6	5	4	3 1/4
Neoprodol (1:1)	200	8 1/2	7	6	5	4 1/4
Super Prodol (SPD)	80	5 1/2	4 1/4	3 1/2	—	—
SPD (1:1)	80	7 3/4	6 1/2	5 1/2	4 1/2	3 3/4
Microdol-X	100	13 1/2	11 1/2	9 3/4	8 1/4	7
D-76	100	8 1/2	7 1/4	6 1/4	5 1/4	4 1/2
	200	12	10	8 1/2	7	6
D-76 (1:1)	100	13	10 1/2	8 3/4	7 1/4	6 1/4
T-MAX Developer	100	6 1/2	5 1/2	4 3/4	4	3 1/2
	200	9 1/2	8	6 1/2	5 1/2	4 3/4
T-MAX RS Developer	100	6 1/4	5 1/4	4 1/2	3 3/4	3 1/4
X tol	100	9 1/2	8	6 3/4	5 1/2	4 3/4
HC-110 (Dil.B)	80	5 1/2	4 1/2	3 3/4	3 1/4	—
ID-11	100	8	6 3/4	5 3/4	4 3/4	4
Perceptol	100	15 1/2	12 1/2	10	8	6 1/2

\* For finer-grain development, Microfine is recommended.

**NOTES**

- EI (Exposure Index) is the exposure determination designator and the camera or exposure meter ISO speed should be set to this value.
- The (1:1) parenthesized ratio given in the foregoing table indicates that one part water is to be added to one part developer.

• **Processing Capacities and Development Times (Small Tank Development, 20°/68°F)**

**[135 Size]**

Unit: minutes

Developer	Processing Capacity	Cumulative Number of Rolls Processed											
		1	2	3	4	5	6	7	8	9	10	11	12
Microfine (600 mℓ)	4	10	11	12	13	—	—	—	—	—	—	—	—
Fujidol E (1ℓ)	12	9	9	9 1/2	9 1/2	10	10	10 1/2	11	11 1/2	12	12 1/2	13
D-76 (1ℓ)	10	7 1/4	7 1/4	7 3/4	7 3/4	8 1/4	8 1/4	8 1/2	8 3/4	9	9 1/2	—	—

**[120 Size]**

Unit: minutes

Developer	Processing Capacity	Cumulative Number of Rolls Processed									
		1	2	3	4	5	6	7	8	9	10
Microfine (600 mℓ)	4	10	11	12	13	—	—	—	—	—	—
Fujidol E (1ℓ)	10	9	9	9 1/2	9 1/2	10	10	10 1/2	11	11 1/2	12
D-76 (1ℓ)	10	7 1/4	7 1/4	7 3/4	7 3/4	8 1/4	8 1/4	8 1/2	8 3/4	9	9 1/2

### • Deep Tank Development Conditions (Development Temperature and Times)

Unit: minutes

Developer	Temp. EI	18°C	20°C	22°C	24°C
		(64°F)	(68°F)	(72°F)	(75°F)
Minidol	100	13 1/2	11	9	7 1/2
Finedol	100	13 1/2	11	9	7 1/2
Super Finedol	80	11	8 1/2	7	5 3/4

\* For finer-grain development, Finedol is recommended.

When deep tanks are used, development times should be extended by 5 to 10%, compared to those used with small tanks.

### (2) Stop Bath

For the stop bath a 1.5 % acetic acid solution is recommended. Immerse the film in the bath at 15 to 25°C (59 to 77°F) for 20 to 30 seconds while agitating.

### (3) Fixing

Fujifix, Fujifix Super-L or Super Fujifix are recommended for fixing. The recommended fixing times at 15 to 25°C (59 to 77°F) are shown below. The required fixing time is twice the time it takes for the film to become clear. In order to maintain fixing uniformity and prevent film staining, agitate the fixing solution continuously for the first 30 seconds.

Fixer	Type	Fixing Time (min.)
Fujifix	Acid hardening fixer	10
Fujifix Super-L	Acid hardening rapid concentrated fixer	5 to 10
Super Fujifix	Acid hardening rapid fixer	3 to 5

### (4) Washing

Wash the film in running water for 20 to 30 minutes. The use of Fuji QW (quick washing agent) is recommended when a shorter washing time is desired or when the processed film shows a slight reddish purple cast. When using Fuji QW, pre-wash the film for about 30 seconds, immerse it in Fuji QW solution for 1 minute, and wash it in running water for 5 minutes. The required wash water temperature is 15 to 25°C (59 to 77°F).

### (5) Drying

After washing, wipe both sides of the film very carefully with a soft sponge, then immerse it in a 1-to-200 solution of Fuji Driwel for 30 seconds and hang it up for uniform drying. For natural drying, hang the film in a well-ventilated dust free location. To protect important negatives from oxidizing gases that cause color fading, it is recommended that the film be treated with Fuji Ag Guard. In this case, use Fuji Ag Guard instead of Fuji Driwel in the procedure.

## 8. PROCESSING IN AUTOMATIC PROCESSORS

### (1) Processing Conditions for Fujifilm Black-and-white Film Processors

#### FP260(FC) Processing

Step	Code	Solution	Temp. (°C)	Time	
				EI 100 (standard)	EI 200
Development	DEV	SPD*1	30±0.3	1min.	1min. 30sec.
Fixing	FIX	Super Fujifix DP2*2	25±0.5	1min. 40sec.	2min. 30sec.
Washing	W1	In running water 5 l/min.	20 to 30	2min.	3min.
	W2				
Rinsing	RINSE	Driwel 5 ml/l	ambient	21sec.	32sec.
Drying	DRY		45 to 65	1min.	2min.
				27sec.	10sec.
Total Processing Time				6min. 28sec.	9min. 42sec.

\*1 SPD differs in mixing procedures between those for manual processing and those for automatic processing.

\*2 Super Fujifix DP2 is adjusted by adding starter to Super Fujifix DP2-R (Replenisher).

### (2) Development Conditions for Hanger-transport Type Processors

Developer	EI	Temperature	Time
Minidol	100	22°C (72°F)	8 1/2 min.
Finedol	100	22°C (72°F)	8 1/2 min.
Super Finedol	80	22°C (72°F)	7 min.

Since the final processing results are affected by such factors as the agitation and circulation conditions of the processor, it is recommended that test prints be made in order to determine the proper development time.

## 9. PROCESSED FILM STORAGE

Exposure to light, high temperature and humid conditions can cause color changes in processed films. Therefore, place such films in sleeves and store them in dark, dry, cool and well ventilated locations under the following conditions.

- Medium-term storage:  
Below 25°C (77°F) at 30% to 60% RH
- Long-term storage :  
Below 10°C (50°F) at 30% to 50% RH


**10. DIFFUSE RMS GRANULARITY VALUE** ..... 7

Processing: Microfine  
 Micro-densitometer Measurement Aperture: 48 μm in diameter.  
 Magnification: 12X  
 Sample Density: 1.0 above minimum density

**11. RESOLVING POWER**

Processing: Microfine, 20°C (68°F), Small tank development  
 Chart Contrast 1.6 : 1 ..... **60** lines/mm  
 Chart Contrast 1000 : 1 ..... **200** lines/mm


**12. SPECTRAL SENSITIVITY CURVE**

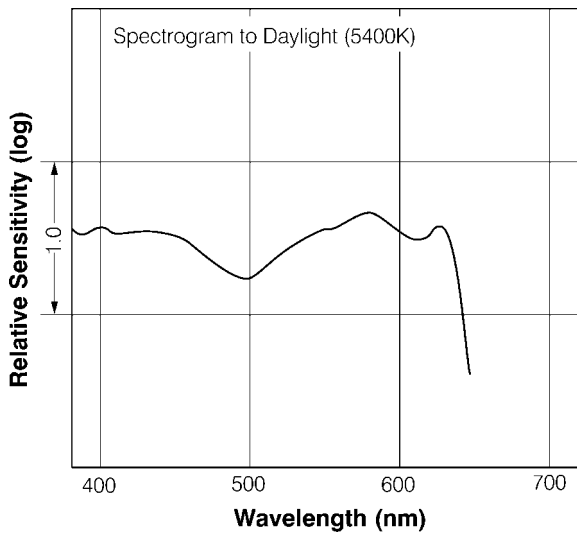


**13. CHARACTERISTIC CURVES**

[135 Size]


**Fujidol E**

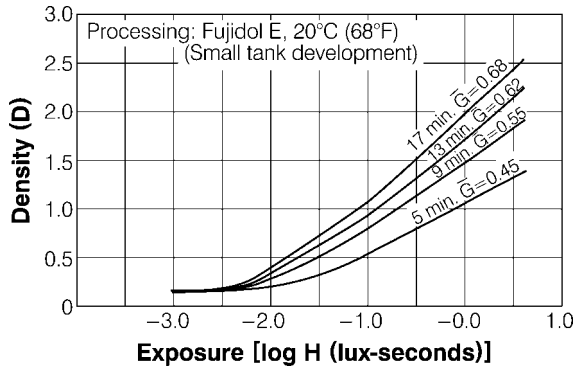

**Microfine**

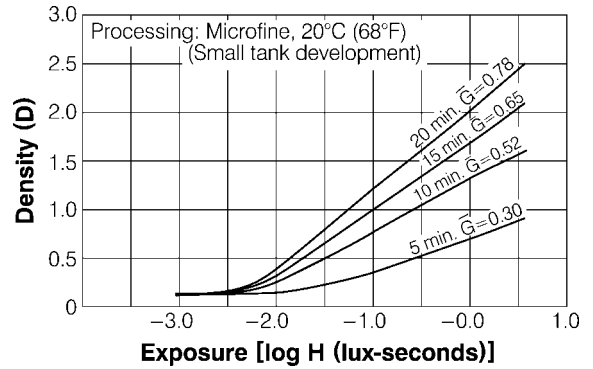


**D-76**

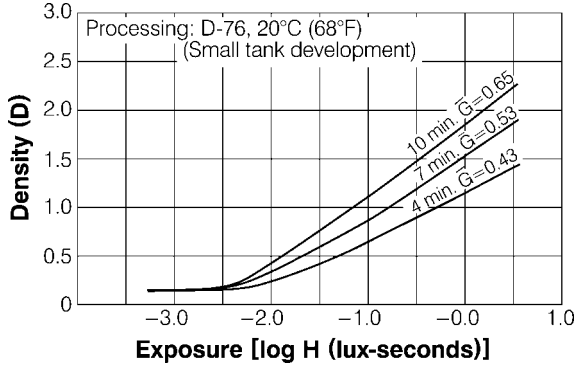


[120 Size]


**Fujidol E**

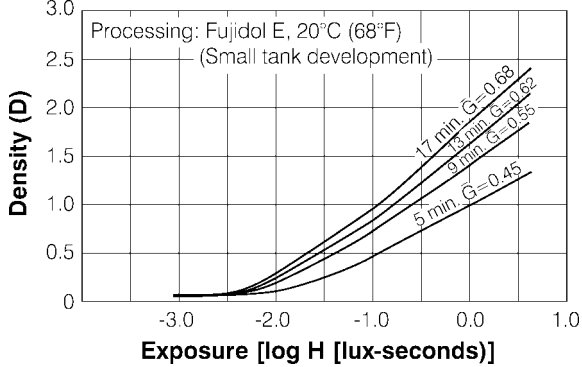


**Microfine**

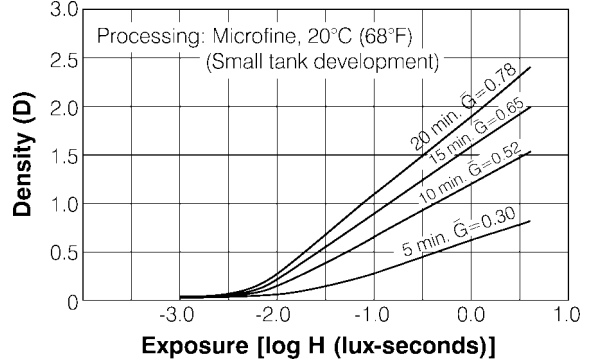

**D-76**

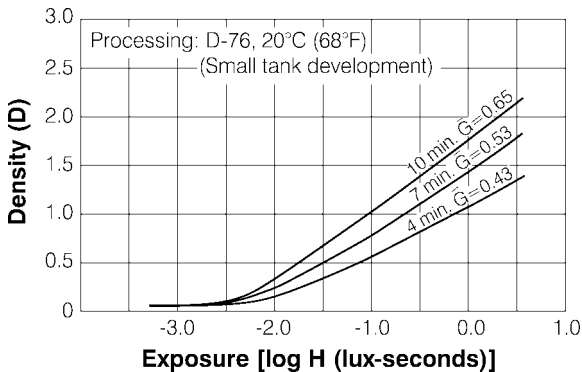

**14. TIME- $\bar{G}$  CURVES**

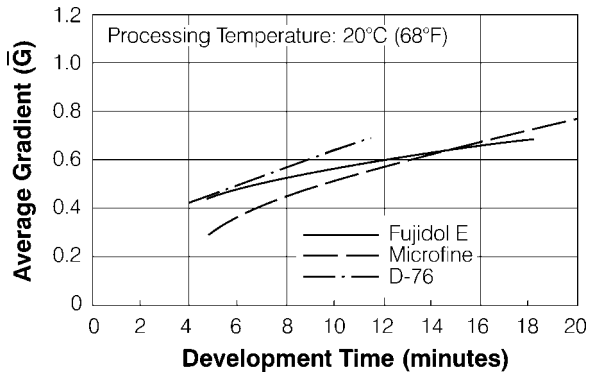

**NOTICE** The data herein published were derived from materials taken from general production runs. However, as Fujifilm is constantly upgrading the quality of its products, so changes in specifications may occur without prior notice.